



VIBRAGUM A/D

EXECUTION	copeaux de caoutchouc synthétique agglomérés
UITVOERING	opeengehoopte synthetische rubber granulaten
DIMENSION AFMETING	selon spécifications volgens specificaties
EPAISSEUR DIKTE	5 - 10 - 15 - 20 mm
DENSITE DICHTHEID	± 800 Kg/m ³
OPTION OPTIE	AUTOCOLLANT ZELFKLEVEND

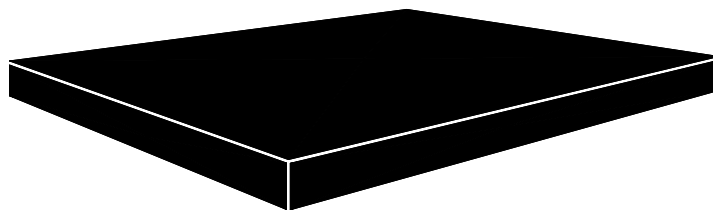

Kg/cm²

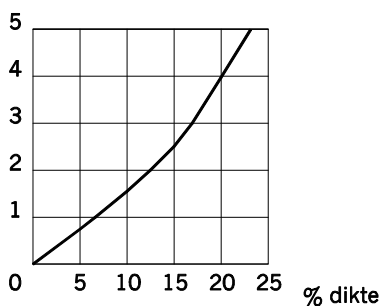


DEFLEXION / DOORBUIGING

VIBRAGUM CHC

EXECUTION	POLYCHLOROPRENE
UITVOERING	POLYCHLOROPREEN
STRUCTURE CELLULAIRE CELLULAIRE SAMENSTELLING	FERMEE GESLOTEN
DIMENSION AFMETING	selon spécifications volgens specificaties
EPAISSEUR DIKTE	5 - 10 - 15 - 20 - 30 mm
DENSITE DICHTHEID	180 ± 20 Kg/m ³
TEMPERATURE AMBIANTE OMGEVINGSTEMPERATUUR	- 45° à + 90°
OPTION OPTIE	AUTOCOLLANT ZELFKLEVEND

Kg /cm²

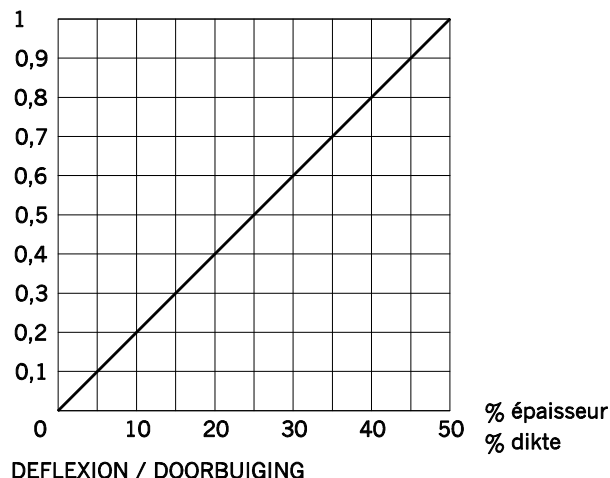

DEFLEXION / DOORBUIGING